

WITA go.future Z+




Product Specials

- 5 years warranty
- Anti-lock function
- LCD display of power consumption
- Strap-on sensor for temperature control
- Weekly program
- Low power consumption 2.5 - 7.0 W
- 3 characteristics
- Compact design
- Ceramic bearings

Technical Data

Maximum delivery head	1.4 m
Maximum flow rate	650 l / h
Power consumption	2.5 - 7.0 W
Regulation	3 constant characteristics
Additional function	anti-lock function
Supply voltage	1 x 230 V, 50 Hz
Motor protection	no external motor protection required
Required protection rating	IP 44
Ambient temperature	0 °C to +40 °C
Temperature of the medium	+5 °C to +65 °C
Temperature sensor regulation range	+20 °C to +60 °C
Temperature class	TF 60 according to EN 60335-2-51
Maximum system pressure	10 bar
Connection sizes	DN 15 (female thread 1/2")
Pump housing material	brass
Weight inclusive insulation	1.3 kg

WITA go.future Z+

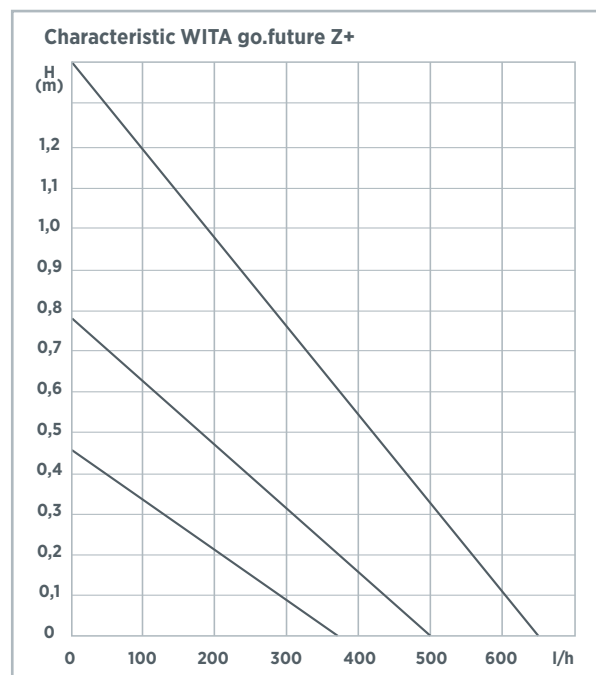

18

81

131